




## Shatterproof Stainless Steel Safety Mirror

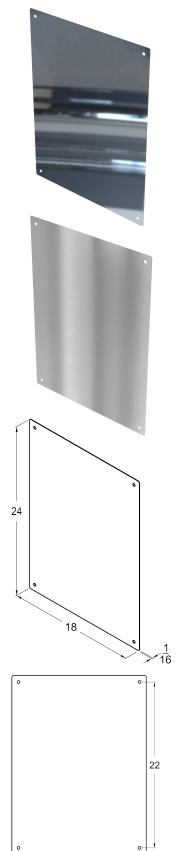

Features:

- Polished Stainless Steel Mirror Surface
- Shatter Proof = No Broken Glass Shard Liability
- Made in USA
- Corrosion-Resistant
- Near Mirror Like Reflection Suitable for Public Restrooms

## Dimensions:

- 4"x8", 10"x10", 10"x16", 12"x12", 16"x16", 18"x24",
- 18"x36", 24"x36", 24"x60", 48"x60"
- Custom Sizes Available Upon Request
- Depth: 1/16

Weight: Varies by model

## Model Names / Material Options:

- AA-PSM-4x8-#8M-18g
- AA-PSM-10x10-#8M-18g
- AA-PSM-10x16-#8M-18g
- AA-PSM-12x12-#8M-18g
   AA-PSM-42x42-#8M-18g
- AA-PSM-16x16-#8M-18g
- AA-PSM-18x24-#8M-18g
  AA-PSM-18x36-#8M-18g
- AA-PSIVI-18X30-#8IVI-180
- AA-PSM-24x36-#8M-18g
  AA-PSM-24x60-#8M-18g
- AA-PSM-24X00-#6M-18g
   AA-PSM-48x60-#8M-18g
- AA-FSIVI-40X00-#0IVI-Toy
   See Website for Additional (
- See Website for Additional Options

Finish: Stainless Steel Polished #8 Finish

**Mounting:** 3/8" Surface Mounting Hole Placements. Mounting Hardware is not included due to wide variety of mounting surfaces. Installer must select 3/8" hardware suitable for application.

Note: It is recommended to use a <u>Hanger Bolt</u> with a <u>Tamper Proof Security</u> nut to secure to wall and allow easy access for sacrificial layer replacement.

**Installation:** Secure fixture to wall with appropriate 3/8" stainless steel anchoring hardware (not provided) for optimal installation strength. Recommend 3/4" or greater back bracing for walls. Partitions may require T-nuts or other suitable anchoring devices.

**Guide Specification:** Mirror shall be constructed with 12 gauge 304L or 12 gauge 316L Stainless Steel joined /w TIG welds and edges de-burred. Mirror shall not be cross-metal contaminated during manufacturing construction. Mirror housing and sacrificial plexiglass surface shall provide protective cover for polished stainless steel reflective surface. Mirror shall have 38" mounting holes. 12 gauge models shall include a 10 year vandalism warranty when properly installed & locked while in service. 316L SS shall be used for US Navy maritime use or if exposure to salt water is prevalent.



16